


IMMERSION RTD'S

TEMPERATURE RANGE: -292°F to 932°F (-180°C to 500°C)

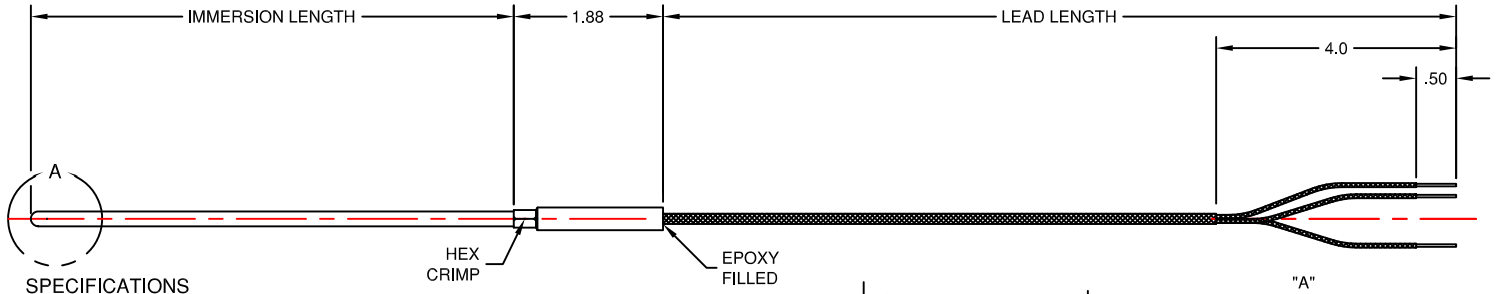

SPECIFICATIONS

RTD Element

Type: Platinum, Wire Wound
 Resistance @ 0° C: 100 OHMS
 Temperature Coefficient of Resistance: .00385
 Sheath Material: 316 Stainless Steel
 Insulation: Hard Packed MgO

Lead Wire


Conductor Size: 24 Gauge Stranded
 Conductor Material: Nickel Plated Copper

Connectors

Body Material: Thermoplastic
 Polarized Pins
 Spring Loaded Inserts
 Maximum Temperature Limit: 390°F (200°C)



DETAIL A

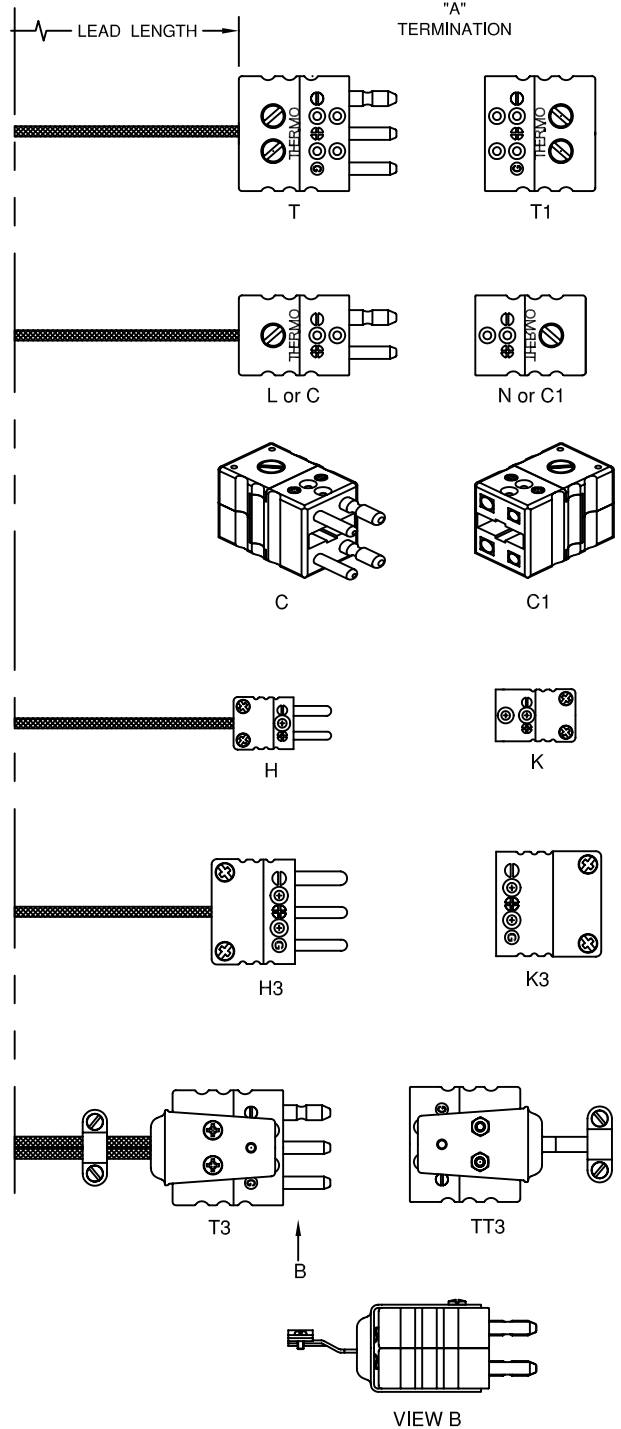

ORDERING CODE

CODE	SHEATH DIAMETER	AVAILABILITY (W=WIRES, T=TOTAL)					
		SINGLE			DUPLEX		
		2W	3W	4W	2W(4T)	3W(6T)	4W(8T)
18	1/8" (3.2mm)	•	•	•	•	•	•
316	3/16" (4.8mm)	•	•	•	•	•	•
14	1/4" (6.4mm)	•	•	•	•	•	•

CODE	ACCURACY (ASTM E1137)
	CLASS B (LEAVE BLANK)
CLA	CLASS A

CODE	IMMERSION LENGTH (IN INCHES)
	12
	36

CODE	LEAD LENGTH (IN INCHES)
	1
	A

CODE	SYSTEM
2W	2 WIRE (4 DUPLEX)
	3 WIRE (LEAVE BLANK)*
4W	4 WIRE

*Single or Duplex



CODE	STRUCTURE
	SINGLE (LEAVE BLANK)
D	DUPLEX

CODE	LEAD WIRE INSULATION
1	FIBERGLASS
5	TEFLON

CODE	TERMINATION
A	BARE ENDS (NOTE 1)
T	STANDARD SIZE 3 PIN PLUG
L	STANDARD SIZE 2 PIN PLUG
C	STANDARD SIZE 4 PIN PLUG
H	MINIATURE 2 PIN PLUG (SEE NOTE 1)
H3	MINIATURE 3 PIN PLUG (SEE NOTE 1)
T3	STANDARD SIZE 6 PIN PLUG

CODE	MATING CONNECTOR (OMIT IF NOT ORDERED)
T1	STANDARD SIZE 3 PIN JACK
N	STANDARD SIZE 2 PIN JACK
C1	STANDARD SIZE 4 PIN JACK
K	MINIATURE 2 PIN JACK
K3	MINIATURE 3 PIN JACK
TT3	STANDARD SIZE 6 PIN JACK

Notes:

- Available with spade lugs, replace "A" with "LG".
- For an item that does not fall within the catalog description an (SP) can be added to the ordering code as part of a custom construction.



TEMPERATURE MEASUREMENT DESIGNER'S GUIDE
 WWW.THERMO-ELECTRIC-DIRECT.COM

SECTION IMRD

TYPE "CE"

IMMERSION RTD'S with LEAD WIRE
 SINGLE & DUPLEX CONSTRUCTION

The information contained hereon shall be considered the sole property of Thermo Electric Company, Inc. The recipient thereof agrees not to disclose or reproduce said information to parties outside the recipient's organization without the written permission of Thermo Electric.

Doc. No.: TE-CO010109-IMRD-070