

BONDED THERMOCOUPLE WAFER ASSEMBLIES

Thermo Electric designs and manufactures temperature measurement solutions that are guaranteed to give you sensitivity, fast response and consistent accuracy with greatest sensor to sensor uniformity. Thermo Electric is committed to deliver its innovative instrumented wafer solutions on time with a world class technical service.

PRODUCT TEMPERATURE RANGES

Low Temp -150 to 800°C
(Silicon Based Adhesive)

THERMOCOUPLE CALIBRATION (ACCURACY)

- **Type K** (±1.1°C or 0.4%) Range -270 to 1372°C
- **Type N** (±1.1°C or 0.4%) Range -270 to 1300°C
- **Type E** (±1.0°C or 0.4%) Range -270 to 1000°C
- **Type R/S** (±1.5°C or 0.25%) Range -50 to 1768°C

SPECIFICATIONS

Sensor Leads

Up to 35ft. - Customization available


Insulations available

- Quartz
- Ceramic
- Teflon
- Polyimide
- Silica

Wire Gauges

20 AWG - 40 AWG

Terminations



Mini Plugs standard and High Temperature Ceramic



D-Pin Subminiature Standard Connectors



Ultra High Vacuum (UHV) Peek Connectors - Sub C & D



Spade Tang



Vacuum Contacts Pins & Sockets 0.056" & 0.040"

Bare Wire



*available with or without bracket

Substrates

Silicon, AlTiC, Glass, Ceramic and other supplied Bare, Coated, or Patterned substrates. Other custom substrates, shapes and sizes available

Substrate Sizes Offered

100mm, 125mm, 150mm, 200mm, 300mm

Feedthrough

Polyimide flat cable with seal under O-ring, atmosphere to 10⁻⁷ Torr capable. Length designated by customer.




SPECIFICATIONS

WIRE GAUGE	36 AWG	30 AWG
STANDARD GAP	0.150mm	0.300mm
PLANARITY	+/-1% STANDARD GAP	+/-1% STANDARD GAP

PAIR THICKNESS

PAIR THICKNESS	100mm	125mm	150mm	200mm	300mm
100mm	1.050mm +/- 0.050	1.250mm +/- 0.050	1.350mm +/- 0.050	1.450mm +/- 0.050	1.550mm +/- 0.050
125mm		2.850mm +/- 0.075	3.050mm +/- 0.075	3.150mm +/- 0.075	3.250mm +/- 0.075
150mm			3.150mm +/- 0.075	3.250mm +/- 0.075	3.350mm +/- 0.075
200mm				3.250mm +/- 0.075	3.350mm +/- 0.075
300mm					3.350mm +/- 0.075

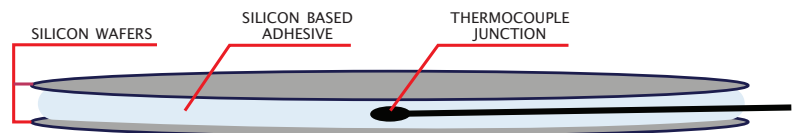

MORE THAN JUST A SENSOR

TE THERMO ELECTRIC
SINCE 1941