


INDUSTRIAL RTD'S

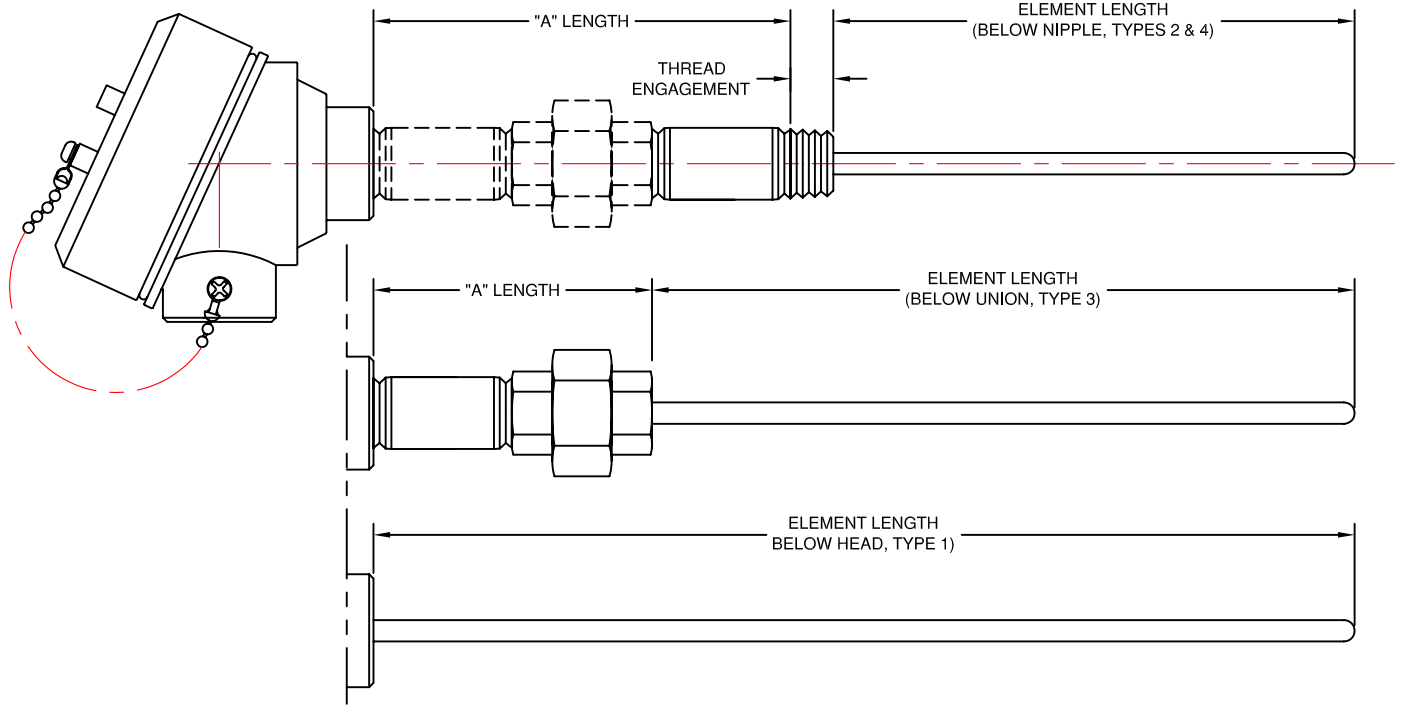

CODE	CONNECTION HEAD		
	MATERIAL	TYPE	NEMA
AN	ALUMINUM	WATER PROOF	4
SN	STAINLESS STEEL	WATER PROOF, CORROSION RESISTANT	4, 4X
AE	ALUMINUM	EXPLOSION PROOF (NOTE 2)	4
SE	STAINLESS STEEL	EXPLOSION PROOF, CORROSION RESISTANT (NOTE 2)	4, 4X
XD	ALUMINUM	EXPLOSION PROOF, FM, CSA APPROVED (NOTES 2 & 3)	4, 4X
A	CAST IRON	WEATHER PROOF, RUGGED	
L	POLYPROPYLENE	WEATHER PROOF, LIGHT WEIGHT	
AX	ALUMINUM, LARGE DEVICE, EPOXY COATED	EXPLOSION PROOF, ATEX APPROVED (NOTE 3)	4

DETERMINING ELEMENT LENGTH

In most cases to determine element length for existing wells, simply measure the overall length of the well and subtract 1/2" for thread engagement. This allows for spring compression on spring loaded elements and minor adjustment to non-spring loaded elements.

CODE	HEAD EXTENSION
1	(NO EXTENSION, 0 "A" LENGTH)
2	NIPPLE
3	NIPPLE/UNION
4	NIPPLE/UNION/NIPPLE

CODE	CONDUIT OPENING
	1/2 or 3/4NPT

CODE	ELEMENT LENGTH
	(IN INCHES)

CODE	TUBE OPENING
	1/2 or 3/4NPT

CODE	ELEMENT EXTENSION
B.H.	BELOW HEAD (TYPE 1)
B.N.	BELOW NIPPLE (TYPE 2 & 4)
B.U.	BELOW UNION (TYPE 3)

CODE	"A" LENGTH
	IN INCHES

4 AE 3/4 - 1/2 - 4 - D 14 PT5 LT - 4W - CLA - 12 B.N.

CODE	STRUCTURE
	SINGLE (LEAVE BLANK)
D	DUPLEX

CODE	SHEATH DIAMETER
316	3/16" (.187)
14	1/4" (.25")

CODE	ACCURACY
	ASTM E1137 CLASS B (LEAVE BLANK)
CLA	ASTM E1137 CLASS A

CODE	ELEMENT TYPE			
	STANDARD	MATERIAL	TCR	RESISTANCE @ 0° C.
	DIN 43760	PLATINUM	.00385	100 OHMS (LEAVE BLANK)
PT5	DIN 43760	PLATINUM	.00385	500 OHMS
PT1	DIN 43760	PLATINUM	.00385	1000 OHMS (LT RANGE ONLY)
JIS	JIS-C-1604-81	PLATINUM	.003916	100 OHMS
SA	RC21-4-1966	PLATINUM	.003923	98,129 OHMS
CU		COPPER	.00427	10 OHMS (LT RANGE ONLY)
NI		NICKEL	.00672	120 OHMS

CODE	SYSTEM
2W	2 WIRE (4 WIRE TOTAL WITH DUPLEX) 3 WIRE (LEAVE BLANK)
4W	4 WIRE (8 TOTAL WITH DUPLEX)

CODE	TEMPERATURE RANGE
LT	-58 to +500° F (-50 to +260° C.)
MT	-58 to +900° F (-50 to +482° C.)
	-292 to +932° F (-180 to +500° C) (LEAVE BLANK)
HT	-292 to +1202° F (-180 to +650° C) (NOTE 4)

Notes:

- (1) Standard Nipples - Steel, Schedule 40. Standard Unions - Black Malleable Iron, 150#. OPTIONAL STAINLESS STEEL Nipples - 304 or 316 Stainless Steel, Schedule 40 or 80. Unions - 304 or 316 Stainless Steel. Example Ordering Code: 4AE 3/4 1/2 6(R or R80).
- (2) Rated NEC class 1, Groups B, C and D.
- (3) ATEX approved EEx d IIC, T6.
- (4) Standard in single construction, 3 wire, class B, Inconel sheath material.
- (5) For an item that does not fall within the catalog description an (SP) can be added to the ordering code as part of a custom construction.



TEMPERATURE MEASUREMENT DESIGNER'S GUIDE
WWW.THERMO-ELECTRIC-DIRECT.COM

SECTION INRD

ASSEMBLIES LESS THERMOWELLS

The information contained hereon shall be considered the sole property of Thermo Electric Company, Inc. The recipient thereof agrees not to disclose or reproduce said information to parties outside the recipient's organization without the written permission of Thermo Electric.

Doc. No.: TE-CO010109-INRD-190