

WATERPROOF ALUMINUM HEAD STANDARD FEATURES Gray Polyester Coated Cast Aluminum Body & Cover Stainless Steel Ball Chain Neoprene O-ring Internal Ground Screw Available Tube Openings: 1/2", 3/4"NPT Available Conduit Openings: 1/2", 3/4"with reducer,


3.75


COMPLIANCE


NFMA-4

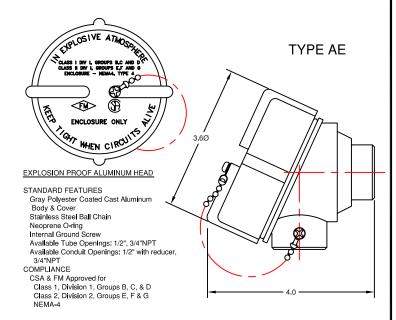


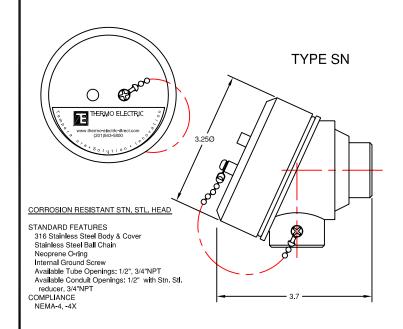


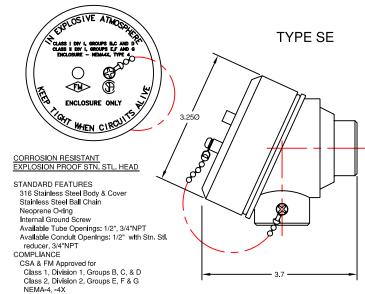









STANDARD 4 POINT TERMINAL BLOCK

TRANSMITTER MOUNTED



SECTION INTO

CONNECTION HEADS

The information contained hereon shall be considered the sole property of Thermo Electric Company, Inc. The recipient thereof agrees not to disclose or reproduce sald information to partles outside the recipients organization without the written permission of Thermo Electric.

Doc. No.: TE-CO010109-INTC-260